

Bucket

Flexibility & experience



Agri



Construction



Industry



Food & beverage



Paper handling

Bucket

Buckets are essential and commonly used attachments in many sectors. These attachments are developed with a lot of care and professionalism to meet the high-quality standards of CAM attachments® and the customers.


The carefully thought-out design resulted in a conical shape. In this way you will save space during the transport of the buckets. The excellently executed welding process increases the durability of these attachments.

Today the bucket range is still growing. We foresee an extended range of different capacities and types of connections, such as Genie, JCB, JLG, Manitou and Merlo.

Features

- Conical shape for easy filling and complete emptying of the bucket
- Wear strips along the bottom of the bucket to protect the underside of the attachment
- Bent reinforcement profiles make the bucket much stronger. The extra reinforcement rib in the centre of the bucket increases its strength even more
- Bent side plates for additional strength
- Extremely durable cutting edge 500HB hardness

Our models

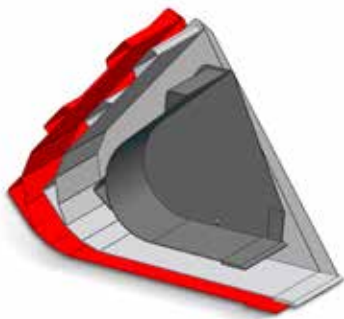

- Bucket 2500 l volume
General bucket
- Bucket 2000 l volume
General bucket
- Bucket 900 l volume
Digging bucket

Overview buckets telehandlers

Genie

Bucket width	Capacity
1900 mm	900 l, 2000 l
2100 mm	900 l, 2000 l
2300 mm	900 l, 2000 l, 2500 l
2450 mm	900 l, 2500 l

JCB

Bucket width	Capacity
1900 mm	900 l, 2000 l
2100 mm	900 l, 2000 l
2300 mm	900 l, 2000 l, 2500 l
2450 mm	900 l, 2500 l

Q-fit

JLG

Bucket width	Capacity
1900 mm	900 l, 2000 l
2100 mm	900 l, 2000 l
2300 mm	900 l, 2000 l, 2500 l
2450 mm	900 l, 2500 l

Manitou

Bucket width	Capacity
1900 mm	900 l, 2000 l
2100 mm	900 l, 2000 l
2300 mm	900 l, 2000 l, 2500 l
2450 mm	900 l, 2500 l

Merlo

Bucket width	ZM2 Capacity	ZM3 Capacity
1900 mm	900 l, 2000 l	900 l, 2000 l
2100 mm	900 l, 2000 l	900 l, 2000 l
2300 mm	900 l, 2000 l, 2500 l	900 l, 2000 l, 2500 l
2450 mm	900 l, 2500 l	900 l, 2500 l






The excellently executed welding process increases the durability of these attachments.

Characteristics

- 1 Reinforced steel blade increases the wear resistance
- 2 Reinforcement inside the bucket prevents warping*
- 3 High quality of the welding process increases the durability
- 4 The conical design allows for compact transportation

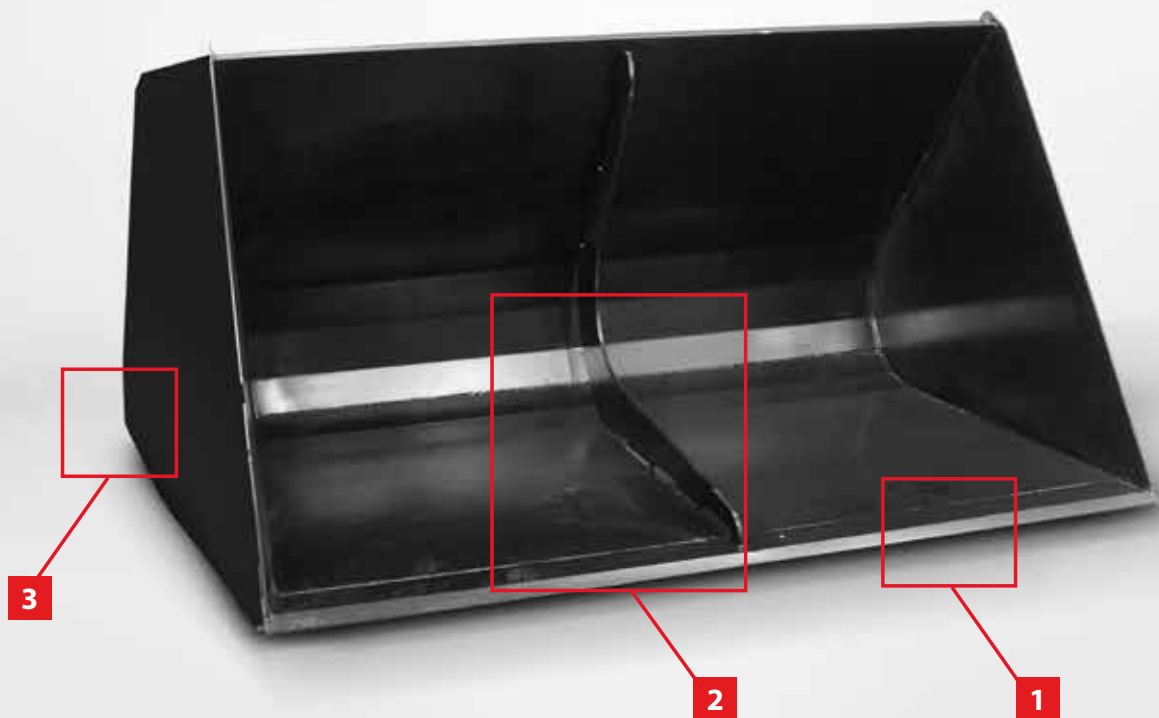

* Valid only for the bucket with 2500 l volume

Can't get enough of our attachments?

Visit our website and discover a wealth of useful information



- > The capacity calculator **automatically calculates the residual capacity**



- > **Detailed product leaflets** of your favourite product group or product



- > Informative product movies in which you can **see our attachments in action**



- > Log on to the website and download your **user manual or spare parts list**



www.camattachments.com

Did you know...

... that you can chat with us live?
Go to our website and click on our chat function. If you have urgent questions, or if you just want to say hello to us...

We are at your service.

Remain up-to-date!

Follow us on Facebook and LinkedIn, and stay informed of our latest CAM attachments news.   

Need more info?

For all your questions about our attachments, you can contact your sales advisor or fill in the contact sheet on our website. **We are happy to help you!**



www.camattachments.com
info@camattachments.com



Rue de Chaumont 4D
4480 Hermalle-sous-Huy
Belgium
T +32 85 24 54 00
F +32 56 43 44 88



Construction



Industry



Food & beverage



Paper handling

Brabantstraat 15
8790 Waregem
Belgium
T +32 56 43 42 11
F +32 56 43 44 88

Your dealer: